






# Auto Urinal Flusher (Recessed Series) HC-AUF-RE09AD



-  Touch-Free IR Activation
-  SS Construction
-  Intelligent Sensing
-  Low Maintenance
-  Water Saving

## Technical Specification

<b>Power :</b>	6V DC	220V AC / DC 6V - 4XAA Alkaline Batteries
<b>Operation</b>	No-touch intelligent flush infra-red sensor	
<b>Sensing Range :</b>	500mm Adjustable	
<b>Water Pressure :</b>	0.02 MPa–0.8 Mpa *0.05 Mpa is minimum required pressure for decent flow of water	
<b>Flush Time :</b>	7-8 Seconds Postflush	
<b>Inlet/Outlet :</b>	G1/2" (Dn15)	
<b>USP :</b>	Easily Serviceable inbuilt solenoid valve in S.S wall box	
<b>Setting :</b>	Sensing range (or detection zone) adjustment pot given at sensor By default range is preset at optimum value Alter setting only if necessary	

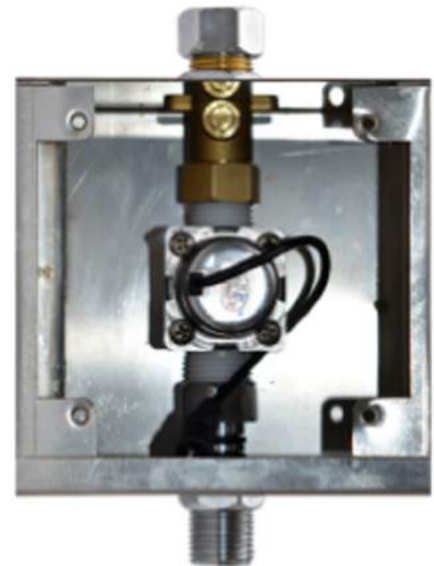

*Automate to Protect*



**Toshi Automatic Systems Pvt. Ltd.**

facebook

LinkedIn

YouTube

WhatsApp

D-132-133/2, Bulandshahar Industrial Area, Ghaziabad - 201009, U.P., India

+91-9711-186-186

info@toshiautomatic.com

www.toshiautomatic.com